

# EclPanel TWCJR4x1



230W Tunable White and colourful LED 4x1 soft light with pixels and lighting effects

ORDER CODE: **ECLPANELTWCJR4X1**



The **EclPanel** TWCJR4x1 is a compact 4x1 LED linear soft light that provides a beautiful, wide source of soft and precise colours. In addition to this, the **EclPanel** TWCJR4x1 comes with a full range of white presets, from daylight to tungsten tones, and produces a tremendous output whilst keeping high CRI, TLCI and TM-30 values. The **EclPanel** TWCJR4x1 has 3 precision rotatory knobs, with three featured modes: CCT with +/- green shift, HSI for total control of hue, saturation and intensity, and FX mode, allowing to scroll through the built-in cinema effects engine. Each of the 4 sections is controlled individually or simultaneously, allowing to play on-board customizable, cinematic effects through its built-in engine or from a console. Despite its lightweight, it has an on-board driver, a built-in power supply, Wireless DMX (CRMX+W-DMX), network connectivity (Art-Net, sACN) and battery inputs (24-36V and 48V)

## MAIN FEATURES

- 230W RGB + Warm White LED source
- CRI >94; R9 >88,8; TLCI >92
- 4 section pixel control and built-in lighting effects for cinema applications, colour gels matching
- Silent operation with multiple fan modes
- Wireless DMX (CRMX+W-DMX), Ethernet connectivity, battery inputs (24-36V, 48V)

## TECHNICAL SPECIFICATION

### LIGHT SOURCE

- Source: 230W RGB + Warm White
- Luminous flux: 16'317lm @3.200 K with MD filter
- Lux: 266lx @5 m full
- CRI: 90 @3.200 K; 94 @5.600 K
- R9: 84,1 @3.200 K; 88,8 @5.600 K
- TLCI: 92 @5.600 K
- TM30 Rf: 90 @3.200 K; 89,4 @5.600 K
- TM30 Rg: 105 @3.200 K; 104 @5.600 K
- Source life expectancy: > 50.000 h

### OPTICS

- Beam angle: 102°
- Field angle: 158°
- Lens type: medium density diffusion panel (interchangeable)
- Additional optics: see available accessories

### COLOUR SYSTEM

- Colour mixing: RGB + Warm White
- CCT: CCT control, + / - green correction, tungsten emulation
- White presets: 2.800 K - 10.000K with 28 K resolution
- Colour wheel: virtual colour wheel with macros

### DYNAMIC EFFECTS

- Control Resolution: 16-bit dimmer, colours
- Pixel patterns: pre-programmed pixel macros and cinema lighting effects patterns
- Special features: linear crossfade channel from any white to any colour; virtual CTO on colours

### BODY

- Body: sturdy die-cast aluminium body
- Body colour: black

### CONTROL

- Protocols: DMX512, RDM, Art-Net, sACN, W-DMX
- Stand Alone: selectable mode through 3 rotatory knobs
- Pixel control: 4 linear section control
- Wireless Control: included, Wireless Solution transceiver
- RDM: RDM for remote monitoring and settings
- Display: Graphic User Interface
- Firmware upgrade: yes, via USB - DMX interface (UPBOX1) not included

### ELECTRONICS

- Dimmer: linear 0 ~ 100% electronic dimmer
- Dimmer curves: selectable dimming modes available
- Strobe / shutter: 1 - 30 Hz, electronic
- Display battery: self-charging battery backup
- Operating temperature: -10° ~ +45°
- LED Control: flicker free frequency with adjustable PWM
- Selectable PWM: 600 ~ 40.000 Hz

### ELECTRICAL

- Mains power supply: 100-240V - 50/60Hz
- Low Voltage DC mains: 24-48V
- Max power consumption: 230W
- Power factor: >0,97

### PHYSICAL

- IP rating: 20
- Cooling: active, silent operation
- Suspension and fixing: bracket for hanging and positioning
- Signal connection: Amphenol XLR 5p IN/OUT connectors
- Power connection: Neutrik powerCON TRUE1 IN/OUT connectors
- Low Voltage DC connector: XLR 4p
- Dimensions (WxHxD): 819x387x144mm
- Weight: 10kg

### CERTIFICATIONS / APPROVALS


- Certifications / Approvals: CE, UKCA, RCM, cTUVus, FCC

## ACCESSORIES & RELATED PRODUCTS


- 9513FXWL03 Ass. 3x2.5mm TH07 cable, 16A 3p 230V CEE plug, MENAC3FXW socket, L.3 m
- 9533FXWL03 Ass. 3x2.5mm TH07 cable, SHUKO plug, MENAC3FXW socket, L.3m
- 958225L03 3x2.5mm TH07 Cable, 16A 3p PwCon MXW, 16A 3p PwCon FXW, L. 3m
- C6002B Slim aluminum clamp, 200kg loading, 48-51mm tubes, M10 bolt, Black
- C6040B Aluminum clamp for 28mm spigot, 200kg load, 48-51mm tubes, black
- ECLFRSPG Spigot for PROLIGHTS Fresnel series
- ECLPANELJR4X1POYO Pole operated aluminium yoke bracket for ECLPANELTWCJR4X1
- EPTWCJR4X1BD Barndoor for ECLPANELTWCJR4X1 with 4 directional flaps to adjust the light beam
- EPTWCJR4X1EC30 30 degree egg crate for ECLPANELTWCJR4X1
- EPTWCJR4X1EC4C 4 chamber egg crate for ECLPANELTWCJR4X1
- EPTWCJR4X1EC60 60 degree egg crate for ECLPANELTWCJR4X1
- EPTWCJR4X1FILTHD Front high diffusion filter (less output) for ECLPANELTWCJR4X1
- EPTWCJR4X1FILTINT Front intensified diffusion filter for ECLPANELTWCJR4X1
- EPTWCJR4X1FILTLD Front low diffusion filter (more output) for ECLPANELTWCJR4X1
- EPTWCJR4X1FILTMD Front medium diffusion filter for ECLPANELTWCJR4X1
- EPTWCBSJR41 SnapBag 4x1 for ECLPANELTWCJR4x1 by DoP choice
- EPTWCSCG4SBJR4140 40° SnapGrid for SnapBag, 4x1 for ECLPANELTWCJR4x1 by DoP choice
- EPTWCSCGJR4140 40° SnapGrid, 4x1 for ECLPANELTWCJR4x1 by DoP choice
- FCLPANELJR4X13U Flight case for 3 pcs of ECLPANELTWCJR4X1
- RSR0630B Steel security cable for hanging bodies, inox steel shackle, L=60 cm, black
- SWIT500W2KIT 24/48V 500W battery (>1.2hrs) KIT including 2\*PBH260S smart power batt.+st.adapt
- TOUR53415L03 Dmx cable HC5340. CANC5MXX XLR 5p->CANC5FFX XLR (f) 5p, L.3m
- UPBOX1U Firmware uploader kit, USB IN, 3pin XLR DMX OUT, USB OUT
- WSBBF1G5 BlackBox F-1 G5 transmitter, 2,45GHz & 5.2/5,8 GHz, DMX/RDM, 512Ch
- WSBBF1G6 BlackBox F-1 G6 transrec, 512ch, 2.45GHz, DMX&RDM,Bluetooth,G3,G4,G4S, G5, CRMX
- WSBBR512G5 BlackBox R-512 G5 receiver 512Ch, 2.45GHz & 5.8GHz, DMX/RDM optional
- WSBBR512G6 BlackBox R-512 G6 receiver 512Ch, 2.45GHz,DMX&RDM, Bluetooth,G3,G4,G4S,G5,CRMX

## PRESET FULL ON

Beam angle 50%: °

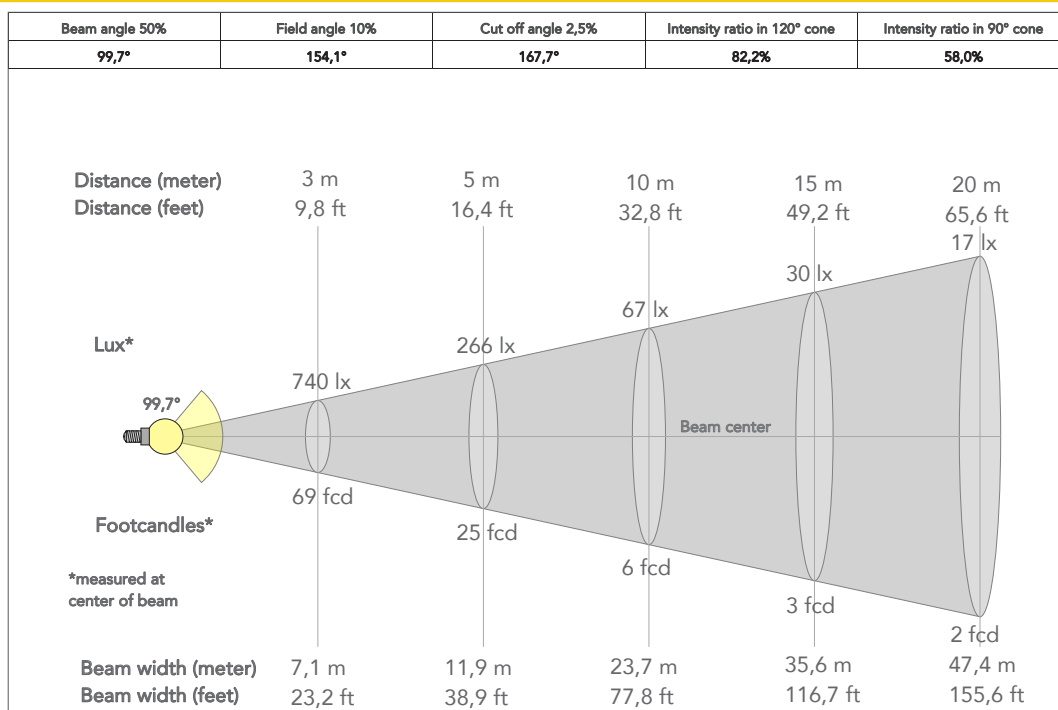

## TECHNICAL DRAWINGS

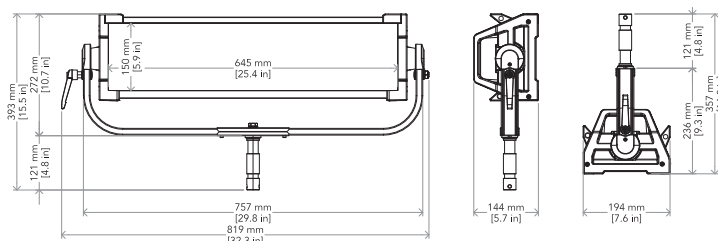

## CERTIFICATIONS / APPROVALS



Conforms to UL STD. 1573  
Certified to CSA STD: C22.2 NO. 166

Visit our website for specifications and tech documentations

