Luma 1500 - (5°)

440 W LED profile

Photometrics

Flux out: 4,410 lm

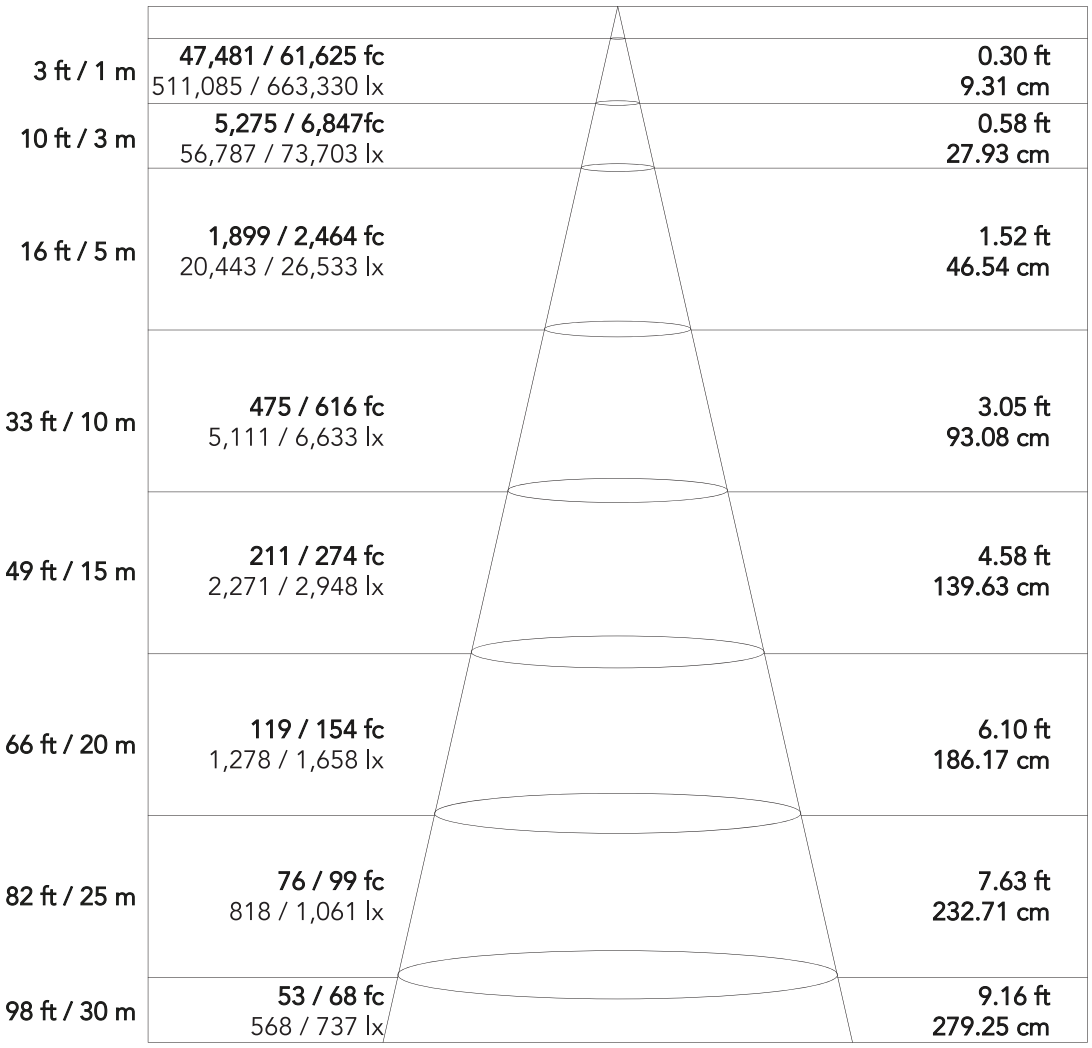

Height	E avg E max	Angle: 5.33°	Diameter
3 ft / 1 m	47,481 / 61,625 fc 511,085 / 663,330 lx		0.30 ft 9.31 cm
10 ft / 3 m	5,275 / 6,847fc 56,787 / 73,703 lx		0.58 ft 27.93 cm
16 ft / 5 m	1,899 / 2,464 fc 20,443 / 26,533 lx		1.52 ft 46.54 cm
33 ft / 10 m	475 / 616 fc 5,111 / 6,633 lx		3.05 ft 93.08 cm
49 ft / 15 m	211 / 274 fc 2,271 / 2,948 lx		4.58 ft 139.63 cm
66 ft / 20 m	119 / 154 fc 1,278 / 1,658 lx		6.10 ft 186.17 cm
82 ft / 25 m	76 / 99 fc 818 / 1,061 lx		7.63 ft 232.71 cm
98 ft / 30 m	53 / 68 fc 568 / 737 lx		9.16 ft 279.25 cm

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Technical specifications and data are provided for guidance only. We reserve the right to amend or alter at any time and without prior notice, the specification of any product. @Prolights

Luma 1500 - (50°)

440 W LED profile

Photometrics

Flux out: 8,150 lm

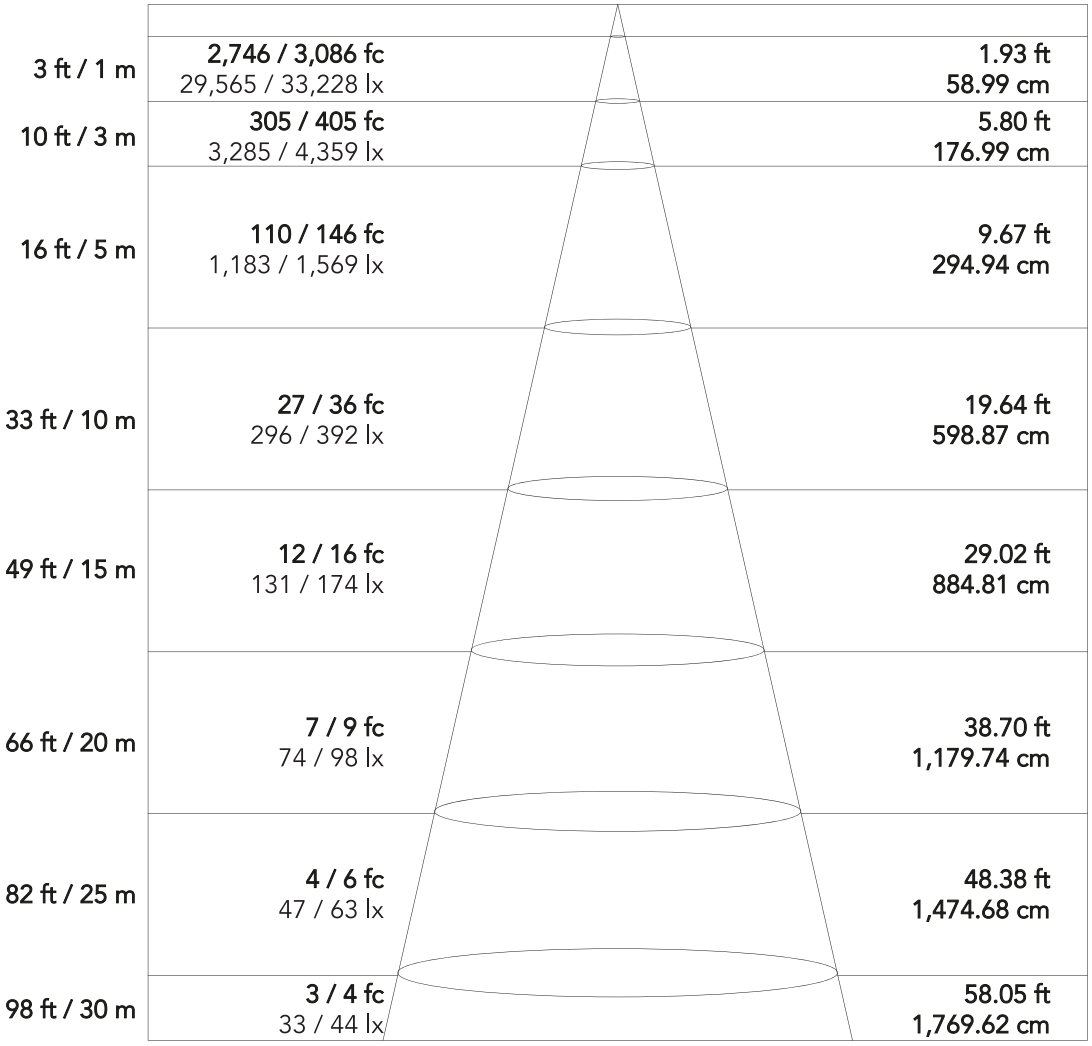

Height	E avg E max	Diameter
3 ft / 1 m	**2,746 / 3,086 fc** 29,565 / 33,228 lx	**1.93 ft** **58.99 cm**
10 ft / 3 m	**305 / 405 fc** 3,285 / 4,359 lx	**5.80 ft** **176.99 cm**
16 ft / 5 m	**110 / 146 fc** 1,183 / 1,569 lx	**9.67 ft** **294.94 cm**
33 ft / 10 m	**27 / 36 fc** 296 / 392 lx	**19.64 ft** **598.87 cm**
49 ft / 15 m	**12 / 16 fc** 131 / 174 lx	**29.02 ft** **884.81 cm**
66 ft / 20 m	**7 / 9 fc** 74 / 98 lx	**38.70 ft** **1,179.74 cm**
82 ft / 25 m	**4 / 6 fc** 47 / 63 lx	**48.38 ft** **1,474.68 cm**
98 ft / 30 m	**3 / 4 fc** 33 / 44 lx	**58.05 ft** **1,769.62 cm**

Angle: 32.87°

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Technical specifications and data are provided for guidance only. We reserve the right to amend or alter at any time and without prior notice, the specification of any product. @Prolights